

Study On Concrete with Partially Replacement of Cement by Egg Shell Powder and Steel Slag

Himanshi Meshram, Pradeep Kumar Nirmal, Lokesh Singh

Department of Civil Engineering, RSR Rungta College of Engineering & Technology, Bhilai, Chhattisgarh, India

ARTICLE INFO

Article History:

Accepted: 07 Sep 2023

Published: 25 Sep 2023

Publication Issue

Volume 7, Issue 5

September-October-2023

Page Number

95-102

ABSTRACT

In the present study an investigation the effect of partial replacement of cement by egg shell powder and steel slag on the various strength and durability properties of concrete by using the mix design of M30 grade of concrete .when cement production produces a large carbon dioxide and causes various effects in the atmosphere. In this program, the use of cement was used to reduce the waste of parts in common applications. It is made on properties of concrete by partial replacement of cement with egg shell and fine aggregate with steel slag. Egg shell powder concrete are varied up to 0 to 20% and steel slag is added to optimum egg shell powder content cement concrete from 0 to 20%.These two waste are recycled as an incomplete replacement of cement and fine aggregate and then characteristics compressive strength & split tensile strength after 7 and 28 days is analyzed and then it is compared with conventional normal concrete strength.

KEYWORDS : Egg Shell , Compressive Strength, Split,

I. INTRODUCTION

Concrete is made of cement, sand, mass mixed with water. Also use the combination to convert its power. Blending as chemicals, mineral compounds used in concrete. concrete is a newly mixed material that can be moulded into any shape. Numbers of cement, mortar (eg, stones or crushed rock) and water mixed together, control concrete structures in wet conditions and solid surfaces. The amount of water required for the chemical mixing of cement and the settlement of the gel pores. Excessive use of water level will result in capillary cavities and less than this

will lead to incomplete hydration. Concrete is a mixture of cement (9 - 15%), water (15 - 16%), good adhesion (sand, 25 - 30%), composite (stones or crushed stones, 30 - 45%), air (2 - 6%) and - admixtures chemicals in which cement and water are strengthened by chemical reactions - hydration - binding the substance almost (unresponsive).



INTRODUCTION OF EGG SHELL & STEEL SLAG
EGG SHELL

Every construction industry wants a wasteful and efficient waste product that can significantly reduce the use of cement and ultimately reduce construction costs. It is widely known that agricultural waste makes up the bulk of the garbage collected in many cities of the world. Egg shells are part of the agricultural waste that pollutes the environment. Egg shells are known to have good energy properties when mixed with concrete. Calcium-rich egg shell is a chicken dung that contains a chemical similar to limestone. The egg shell is the hard outer shell of the egg. It contains calcium carbonate, a common calcium. Some are made up of proteins and other minerals.

India ranks second in the world in annual egg production. Many of these egg shells will be in the trash every year. Disposal of egg shells is a major problem because when sent to landfills it attracts insects and creates problems related to human health and the environment. The shell of the egg is rich in calcium and has a texture similar to that of limestone. The use of egg shell waste instead of natural lime in cement can have benefits such as keeping natural lime and using waste. The purpose of the present study is to determine the possible use of these waste as concrete suspension materials. Eggshell is rich in calcium and like limestone in chemical formulation, it is a waste product. Therefore, to begin the use of

egg shell debris to add concrete to the concrete part, it is necessary to understand the concrete structures made of egg shell powder.



Physical properties - There are various physical properties are given below

TABLE NO .1.1 PHYSICAL PROPERTIES OF EGG SHELL

PROPERTIES	AMOUNT
Specific Gravity	1.92
Moisture Content	1.18
Bulk Density	0.8
Surface Area (m ² /g)	21.2
Fineness	5.9

Chemical properties – There are various chemical properties are given below

TABLE NO.1 .2 CHEMICAL PROPERTIES OF EGG SHELL

CONTENT	PERCENTAGE
CaO	51.25%
SiO ₂	0.14%
Al ₂ O ₃	0.09%
MgO	0.56%
Na ₂ O	0.22%
Fe ₂ O ₃	0.04%
SO ₃	0.6%

II. LITERATURE REVIEW

Riyaz Khan, Dr. S. B. Shinde International Journal of IT, Engineering and Applied Sciences Research (IJIEASR)[2013] - Steel Slag is produced locally in large quantities, creating problems for the environment when disposed of. in concrete by replacing it partially and completely with good integration to keep other boundaries constant. Shear strength is considered an investigation into the M20 range of concrete by 0.5 w / c average every time. 0.20, 40, 60, 80, 80 & 100% slag steel was used. Good results are obtained with a 60% change rate. Therefore, the use of stainless steel in concrete will improve the strength of the concrete.

Dhanalakshmi M, Dr Sowmya N J, Dr Chandrashekar A International Journal of Engineering Research & Technology (IJERT) [2015]- The carbon dioxide produced by the cement industries creates pollution

and global warming. About 1000Kg of cement production processes about 900Kg of CO₂ is emitted. To reduce the impact of air cement production, waste products are used as a component in this study, to pollute the environment and use natural resources. 75 million tons of silica- rich fly ash is disposed of in landfills each year in India. Calcium-rich Egg shell powder is discarded as waste. In the present study, these two waste products are used to partially replace cement and various structures such as performance, compressive strength, and quantity determined. Egg shell powder range up to 12.5% (0%, 2.5%, 5%, 7.5%, 10% and 12.5%) and an ash fly is added to the well-made egg shell powder cement from 0% to at 30% (0%, 5%, 10%, 15%, 20%, 25% and 30%).

Arun Kumar, G.Vasudhevan International Journal on Applications in Civil and Environmental Engineering [2015] M40 concrete with a higher amount of slag metal instead of fine aggregate has been tested in the present study. Quality is determined from the test values. In the case of the best part of the steel slag sand has been replaced by a good proportion by a wide range of 10%, 20%, 30%, 40%, 50%. Visual features are done experimentally. depending on the material the compressive strength, flexural strength, tensile strength is divided and the modulus of elasticity was obtained by experimentation. The results are found to be increasing with an increase in the percentage of iron ore, and it is concluded that iron ore can be used in partial concrete.

III. MATERIAL USED

TABLE 3.1 PHYSICAL PROPERTIES OF CEMENT

S.No	Characteristics	Experiment value	Requirement as per IS :8112 -1989
1	Normal consistency	32	
2	Initial setting time (min)	50	Min 30
3	Final setting time(min)	550	Max 600
4	Specific gravity	3.16	3.15
5	Soundness (mm)	1.00	Max 10

In this project the M20 & M30 concrete range is considered. The mixture was designed using IS 10262: 2009. The mass ratio of M20 was 1: 1.756: 3.06: 0.5 & M30 was 1: 1.51: 2.74:0.45. Cement was replaced with egg shell by 0%, 5%, 10%, 15% and 20% & good adhesion fine aggregate was replaced by the steel slag by 0%, 5% 10%, 15% and 20%. The composition of the mix value was under the table below-

MIX DESIGN OF M30 GRADE OF CONCRETE STEP -1

DESIGN PARAMETER

- Appointment of Grade M 30
- Ultra-Tech 53 cement type in range compliant with IS 8112
- Maximum measurement size of 20 mm
- Minimum cement content 300 kg / m³ (Table 5 IS 456-2000)
- Maximum water level 0.55 (Table 5 IS 456-2000)
- Working 75mm fall
- Medium Display Status (Table 5 IS 456-2000)
- How to lay concrete is Manual laying
- Good quality management
- Types of angular aggregated angles
- Cement content size 450 kg / m³ (IS 456-2000)

STEP – II

TEST DATA FOR MATERIALS

- Cement has been applied to the OPC-53 grade in accordance with IS 8112
- Sp.gr cement 3.15
- Sp.gr of Coarse aggregate 2.750
- Sp.gr of Fine aggregate 2.57
- The sand is in the Zone - II

STEP –III

Target Strength For Mix Proportioning

- $f'_{ck} = f_{ck} + 1.65 s = 30 + 1.65 \times 5 = 38.25 \text{ N / mm}^2$
- from Table 1 of IS 10262-2009, $s = 45 \text{ N / mm}^2$

STEP –IV

Water Scale Selection

- From Table 5 of IS 456-2000, the maximum water level of the cement = 0.55 based on experience, use a water level of cement = 0.45
- $0.45 < 0.55$ Therefore O.K.

STEP –V

Water content selection

- From Table 2 of IS 10262-2009,
- water content = 186 litre by a 25mm-50mm drop, 3% water should be added every 25mm.
- $186 + (186 \times 3 / 100) = 191.58 \text{ litre}$

STEP - VI

Cement Content Calculation

- $W / C \text{ ratio} = 191.58 / 0.45 = 426 \text{ kg / m}^3$.
- From Table 5 of IS 456-2000, the minimum cement content of 'low' exposure is 300kg /

m³.

- 426kg / m³ > 300 kg / m³ So OK

STEP – VII

Combine calculation with unit volume


- Volume of Coarse aggregate = 0.63
- Volume of Fine aggregate = 0.37
- volume of concrete = 1 m³
- Cement Capacity = (Cement Mass / Sp. Cement) x (1/1000) = (426 / 3.15) x (1/1000) = 0.135m³
- Water Capacity = (Mass Mass / Sp. water) x (1/1000)
□ = (191.58 / 1) x (1/1000) = 0.191 m³
- Total volume in aggregates = [a - (b + c)] = 1 - 0.326 = 0.674 m³
- Mass of coarse aggregate= 0.674 x 0.63 x 2.75 x 1000 = 1167.705kg / m³
- Mass of fine aggregate= 0.674x 0.37 x 2.575 x 1000 = 642.15kg / m³

Result

Effect of EGG SHELL and STEEL SLAG on the compressive strength of the cubes

TABLE :- SPLIT TENSILE STRENGTH OF M30 GRADE OF CONCRETE

S.No	Percentage Replacement Of Cement (%)		Percentage Replacement Of Fine Aggregate (%)		Compressive Strength (MPa) 28 Days
	Cement	Egg shell	Fine aggregate	Steel slag	
(A)	100	0	100	0	3.1
(B)	95	5	95	5	3.23
(C)	90	10	90	10	3.54
(D)	85	15	85	15	3.35
(E)	80	20	80	20	3.29

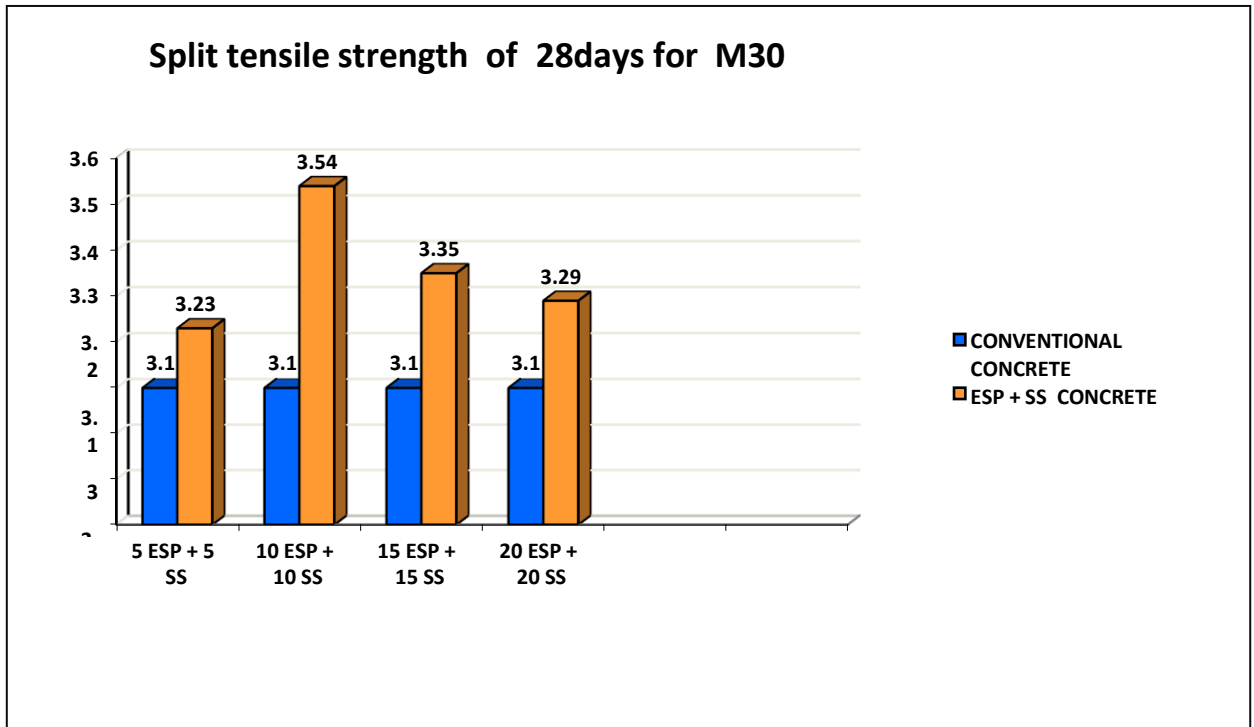

IV. CONCLUSION FOR COMPRESSIVE STRENGTH TEST

- The compressive strength of a typical concrete cubes is 35.38 MPa for 28 days, while the compressive strength of the cement replacement is 10% ESP and a good concentration of 10% slag in 28 days obtained at 37.97 MPa. Also, it is found that the compressive strength of the replacement concrete cubes is 2.59% higher than that of standard concrete in the M30 range sequence.
- Eggshell powder & slag metal concrete can improve the compression strength.
- Construction costs are reduced by adding egg shells and iron powder.
- The strength of the concrete separation of the concrete slabs is 2.8MPa in 28 days, and the strength is divided into partial cement by 15% ESP and a good concentration of 15% steel in

28 days obtained by 3.24MPa in the M20 range of concrete to obtain high strength.

- The strength of the solid separation of standard concrete particles is 3.1MPa in 28 days, and the strength is divided into partially converted concrete at a cost of 10% ESP and a good concentration of 10% slag in 28 days obtained by 3.54MPa in M30 grade concrete high power.
- Consequences that, regardless of the percentage change of ESP and steel there was a positive correlation between the compressive strength and the split strength of the strength.
- Egg shell is readily available in the market and Steel slag is also available in the industry.

V. REFERENCE

- [1]. www.ijraset.com -International Journal for Research in Applied Science & Engineering

Technology (IJRASET) ISSN: 2321-9653; IC Value: 45.98; SJ Impact Factor:6.887 Volume 5 Issue VIII, August 2017.

- [2]. <http://www.ijirset.com> International Journal of Innovative Research in Science, Engineering and Technology (An ISO 3297: 2007 Certified Organization) Vol. 6, Issue 3, March 2017.
- [3]. <http://www.ijlrec.com> International Journal of Latest Research In Engineering and Computing (IJLREC) Volume 5, Issue 4 , Page No. 6-9 July-August 2017. Study of egg shell powder as a cement replacing material in concrete.
- [4]. www.ijedr.org International Journal of Engineering Development and Research IJEDR 2018 | Volume 6, Issue 2 | ISSN: 2321-9939 Partial Replacement Of Fine Aggregate Using Steel Slag.
- [5]. <http://www.ijtre.com> International Journal For Technological Research In Engineering Volume 5, Issue 10, June-2018 ISSN (Online): 2347 – 4718, AN experimental investigation on partial replacement of cement with egg shell powder and fine aggregate with copper slag in concrete.
- [6]. <http://www.ijseas.com> International Journal of Scientific Engineering and Applied Science (IJSEAS) – Volume-3, Issue-11, Nov 2018 ISSN: 2395-3470 Comparative Study On Partial Replacement For Fine Aggregate By Using Steel Slag And Weld Slag In Concrete.
- [7]. International Journal of Research Volume 7, Issue IX, September/2018 ISSN NO: 2236-6124. Evaluation of fresh and hardened properties of scc by partial replacement of cement with egg shell powder and fine aggregate with foundry sand.
- [8]. Journal of Structural Technology e-ISSN: 2581-950X Volume 4 Issue 3 © MAT Journals 2019 A Study on Strength Properties of Concrete by Partial Replacement of Egg Shell Powder in Cement and Steel Slag in Fine Aggregate.
- [9]. <http://www.ijmrem.com> International Journal of Modern Research in Engineering & Management (IJMREM) ||Volume|| 2 ||Issue|| 9 ||Pages|| 22-31 || September 2019 || ISSN: 2581-4540 Analysis of

eggshell powder as a partial replacing material in concrete.

Cite this article as :

Himanshi Meshram, Pradeep Kumar Nirmal, Lokesh Singh, "Study On Concrete with Partially Replacement of Cement by Egg Shell Powder and Steel Slag", International Journal of Scientific Research in Civil Engineering (IJSRCE), ISSN : 2456-6667, Volume 7, Issue 5, pp.95-102, September-October.2023
URL : <https://ijsrce.com/IJSRCE123756>