

# Effect of Metakaolin and Basalt Fibre on Mechanical Properties of Conventional Concrete

Wable Arti C, Pachpute Prajka K, Gore Sayali R, Galande Sonali A, Prof. Pachpute A. B.  
HSBPVT's College of Engineering Kashti, Savitribai Phule, Pune University, Maharashtra, India

## ABSTRACT

Concrete is one of the well-known construction materials. However, the production of Portland cement, an essential constituent of concrete, leads to the release of significant amount of CO<sub>2</sub>, a greenhouse gas; one ton of Portland cement clinker production is said to create approximately one ton of CO<sub>2</sub> and other greenhouse gases. Environmental issues are playing an important role in the sustainable development of the cement and concrete industry. Today many researches are ongoing into the use of Portland cement replacements, using many waste materials like pulverized fly ash (PFA) and ground granulated blast furnace slag (GGBS). Like PFA and GGBS, a metakaolin is also used as a binder with partial replacement of cement which takes some part of reaction at the time of hydration, also it acts as a filler material. Cement replacement by metakaolin in the range 5% to 25% with an increment of 5% is to be studied in addition with basalt rock fibre by volume fraction in range from 0.05% to 0.25% with an increment of 0.05%. It was tested for mechanical properties at the age of 7, 28 days and compared with those of conventional concrete.

**Keywords :** Granulated Blast Furnace Slag, Pulverized Fly Ash

## I. INTRODUCTION

Concrete is a blend of cement, sand, coarse aggregate and water. The key factor that adds value to concrete is that it can be designed to withstand harshest environments significant role. Today global warming and environmental devastation have become manifest harms in recent years, concern about environmental issues, and a changeover from the mass-waste, mass-consumption, mass-production society of the past to a zero-emanation society is now viewed as significant. Due to global warming the need to cut down energy consumption has increased. The effect of global warming has impacted everyone on the planet and is a well-recognized concept. The interest of construction community in using waste or recycled materials in concrete is increasing because of the emphasis placed on sustainable construction.

Metakaolin is one of the innovative clay products developed in recent years. It is produced by controlled thermal treatment of kaolin. Metakaolin can be used as a concrete constituent, replacing part of the cement content since it has pozzolanic properties. The use of metakaolin as a partial cement replacement material in mortar and concrete has been studied widely in recent years. Basalt is well known as a rock found in virtually every country round the world. Its main use is a crushed rock in construction, industrial and high way engineering. However, it is not commonly known that basalt can be used in manufacturing and made into fine, superfine and ultrafine fibres. Comprise of single-ingredient raw materials melt basalt fibres are superior to other fibres in terms of thermal stability, heat and sound insulation properties, vibration resistance and durability. plastics, 10% wood, 5%metal, & 10%

other mixtures. As reported by global insight, growth in global construction sector predicts an increase in construction spending of 4800 billion US dollars in 2013. These figures indicate a tremendous growth in the construction sector, almost 1.5 times in 5 Years.

## II. EXPERIMENTAL WORK

The material details are as follows:

### 2.1 Cement

For this research, locally available cement which is of the ordinary Portland cement type (53 grade) was used throughout the work. Specific gravity of cement was 3.15.

### 2.2 Fine Aggregate

Locally available fine aggregate used was 4.75 mm size confirming to zone II with specific gravity 2.66. The testing of sand was conducted as per IS: 383-1970. Water absorption and fineness modulus of fine aggregate was 1.35% and 2.74 respectively.

### 2.3 Coarse Aggregate

Coarse aggregate used was 20mm and less size with specific gravity 2.70. Testing of coarse aggregate was conducted as per IS: 383-1970. Water absorption and fineness modulus of coarse aggregate was 0.7% and 7.17 respectively.

### 2.4 Water

The water used was potable, colourless and odourless that is free from organic impurities of any type.

### 2.5 Metakaolin

Metakaolin is one of the innovative clay products developed in recent years. It is produced by controlled thermal treatment of kaolin. Metakaolin can be used as a concrete constituent, replacing part of the cement content since it has pozzolanic properties



Fig1.1 : Kaolin

### 2.6 Basalt fibre

is well known as a rock found in virtually every country round the world. Its main use is a crushed rock in construction, industrial and high way engineering. However, it is not commonly know that basalt can be used in manufacturing and made into fine, superfine and ultrafine fibres.

### 2.7 Mechanical Properties

- Tensile strength. 4.84 GPa
- Elastic modulus. 89 GPa
- Elongation at break 3.15%
- Density 2.7 g/cm<sup>3</sup>

## III. OBJECTIVES

To investigate mechanical properties of Basalt Fibre Metakaolin Concrete (BFMC) composite with various volume fractions.

- To investigate the effect of metakaolin on properties of fresh concrete such as workability and density.
- To compare the properties of BFMC with that of normal concrete.
- Decide quality of concrete using Non-destructive testing.

- To study the behaviour of concrete by adding basalt fibre and metakaolin. \

#### IV. SCOPE OF THE WORK


Use of metakaolin as a partial replacement of cement in concrete is a new option that has now emerged in the world of concrete. As metakaolin is a material that has many other applications, of which one is studied in this project report. This replacement reduces the demand of deficient cement and ultimately solves some environmental concerns. Scope of present work is to use the optimum ratio of the materials which will enhance the different parameters of the concrete.

#### V. RESULTS AND DISCUSSION

##### RESULTS

##### Compressive Strength (7 Days):


Three cubes of size 150x150x150 mm were casted to work out the 7<sup>th</sup> and 28<sup>th</sup> day's compressive strength of all the proportions. The graph gives the results of test conducted on hardened concrete with 0- 25% metakaolin powder for 7 days.

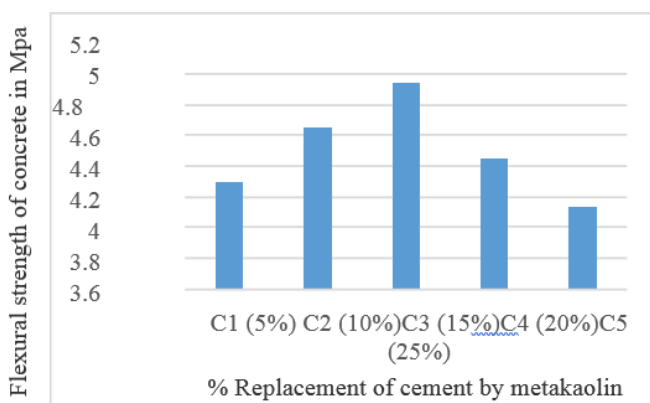

**Graph 5.1):** Comparative compressive strength of concrete with cement replacement with metakaolin for 7 days.

It is clear from Graph compressive strength obtained for concrete with 15% replacement by metakaolin


powder showed a higher value by 30% compared to control concrete for 7 days. Above results shows that 15% metakaolin replacement is feasible as strength point of view, so further work will carried out with 15% replacement of metakaolin in addition with basalt fibre. The graph gives the results of test conducted on hardened concrete with 0-25% metakaolin powder for 28 days.

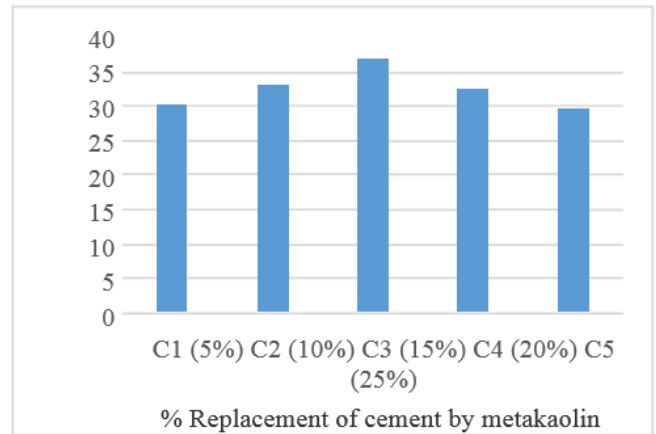

**Graph 5.2)** Comparative compressive strength of concrete with cement replacement with metakaolin for 28 days.

##### Flexural Strength


Three beams of size 100x100x500mm were casted and cured for 28 days. The flexural strength is determined

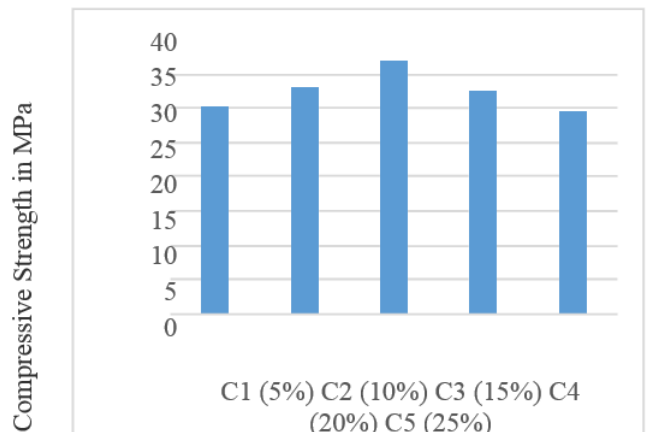

**Graph 5.3):** Comparative flexural strength of concrete with cement replacement with metakaolin for 28 days

##### Spilt Tensile Strength:


Three cylindrical sections of diameter 150 mm and length 300 mm were casted and cured and and tested after 28 days.

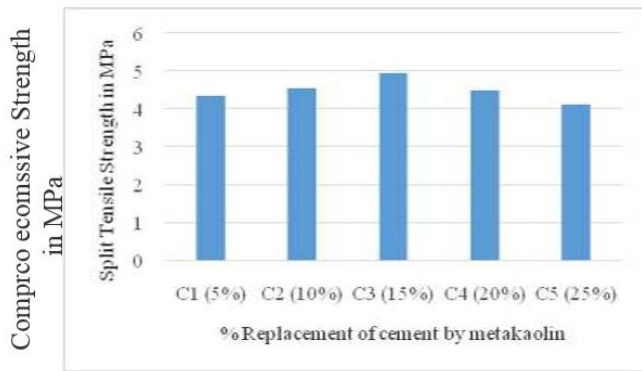

**Graph 5.4)** Comparative Split tensile strength of concrete with cement replacement with metakaolin for 28 days.

### 5.3) Workability Test:

Slump Cone test was conducted for investigation of workability of fresh concrete. Following graph shows the slump value for all proportions.

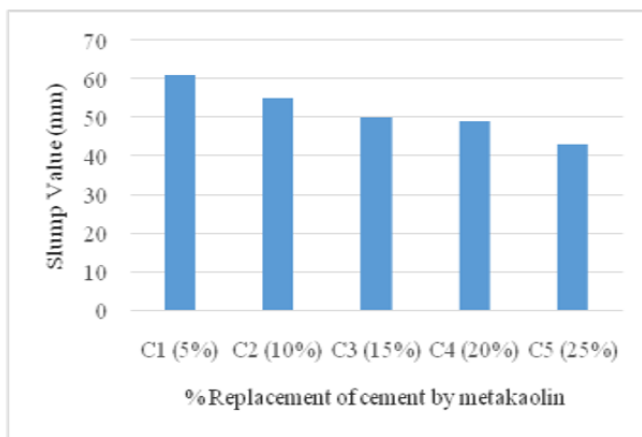

**Graph 5.5):** Comparative slump value of concrete with cement replacement with metakaolin for 28 days.

## VI. DISCUSSION

The influence of metakaolin powder & basalt fibre on the Properties of concrete such as the compressive strength, slump are studied. An appreciable increase in the compressive strength is observed with the increase in the percentage replacement of cement by metakaolin powder from 5 % to 15 %. With 15% replacement the increase in strength is approximately 30%. Also the experimental results shows that the addition of basalt fibre up to 0.15% improved considerable post cracking flexural strength. It means

addition of basalt fibre made the concrete more tough and ductile. The test results of flexural strength of metakolin concrete containing basalt fibre were found to increasing upto 0.15% addition of basalt fibre than the conventional concrete. Slump test was carried out and the slump was found to be 50mm with 15% replacement. Considering the strength criteria, the replacement of cement by metakaolin powder is feasible up to 15%.

## VII. CONCLUSION

Based on experimental observations, following conclusions can be established:

1. The strength of concrete increases with increase in metakaolin content upto 15% replacement of cement.
2. The strength models developed for BFMC predicts the results of various strengths which are in good compliance with experimental results.
3. The strength of BFMC has increased in flexure and split tensile up to addition of 0.15% of basalt fibre.
4. As the Percentage of metakaolin powder in concrete increases, workability of concrete decreases As metakaolin content increases, cement paste available is less for providing lubricating effect per unit surface area of aggregate which reduces the workability of concrete.

## VIII. ACKNOWLEDGEMENT

Experimental work was carried out using the facilities in Civil Engineering Department laboratory of HSBPVT GOI, COE Kashti. I wish to thank Prof. S.N. Mahadik, Prof.S.A.Pawar my guide, Prof. A.B. Pachpute for their valuable Suggestions and authorities for their kind support. I also wish to thank the laboratory staff for their help and support during experimental work.

## IX. REFERENCES

- [1]. S.S. Potgieter-Vermaak, Metakaolin as an extender in south African cement Journal of Materials in Civil Engineering 18(4):619 - 623 . August 2006DOI: 10.1061/(ASCE)0899
- [2]. Jian-Tong Ding and Zongjin Li, Effects of Metakaolin and Silica Fume on Properties of Concrete ACI MATERIALS JOURNAL Title no. 99-M39
- [3]. Kunal Singh, A Short Review on Basalt FIBRE, 2012, pp. 20, 23.
- [4]. Dr. N. Subramanian., Sustainability of RCC structures using Basalt composite rebars, September 2010. PP 5.
- [5]. Van De Velde K. ,et al., Basalt fibres as reinforcement for composites, March 2006 6. EythorThorhallssonetal., Reykjavik University & Iceland GeoSurvey, November2013, PP 2.
- [6]. Kunal Singh, A Short Review on Basalt FIBRE, 2012, pp. 20, 23.
- [7]. Matthews, F.L., Rawlings, R. D., Composite Materials: Engineering and Science.1994.
- [8]. Akovali, G., Handbook of Composite Fabrication. 2001.
- [9]. Chou, T.-W., and Ko, Frank K., Textile Structural Composites. 1988, Amsterdam, The Netherlands: Elsevier Science Publishing Company Inc.
- [10]. GajananDeshmukh; Basalt - The Technical Fibre; Man-made Textiles in India; July 2007; 258-261.
- [11]. Davidovits J. Properties of geopolymer cements. In: Proceedings of the 1st International Conference on Alkaline Cements and Concretes. Kiev, Ukraine, 1994. p. 131-49; Ph.D. Thesis, Instituto Militar de Engenharia, Rio de Janeiro, Brasil, 1999.
- [12]. M.S. Shetty, "Concrete Technology", S. Chand and Company Limited.
- [13]. M. L. Gambhir, "Concrete Technology", Tata McGraw-Hill Publishing Company Limited, New Delhi, 2006.
- [14]. IS 10262: 2009, "Indian Standard, recommended guidelines for concrete mix designs", Bureau of Indian Standard, New Delhi.
- [15]. IS 383-1970, "Specifications for Coarse and Fine Aggregates from Natural sources for Concrete", Bureau of Indian Standards, New Delhi.
- [16]. IS 456: 2000, "Code of Practice for Plain and Reinforced Concrete", Bureau of Indian Standards, New Delhi, India, 2000.

### Cite this article as :

Wable Arti C, Pachpute Prajkta K, Gore Sayali R, Galande Sonali A, Prof. Pachpute A. B., "Effect of Metakaolin and Basalt Fibre on Mechanical Properties of Conventional Concrete", International Journal of Scientific Research in Civil Engineering (IJSRCE), ISSN : 2456-6667, Volume 4 Issue 3, pp. 23-27, May-June 2020.

URL : <http://ijsrce.com/IJSRCE20436>