

# Effect of Die Geometry on Fatigue Analysis of Aluminium Alloy (ADC12 Aluminium A383) using Pressure Die Casting Process

Poshan Dewangan<sup>1</sup>, Ved Prakash Dewangan<sup>2</sup>, Sushil Kumar Maurya<sup>3</sup>, Lokesh Singh<sup>4</sup>

<sup>1,2</sup>Research Scholar, RSR Rungta College of Engineering and Technology, Bhilai, Chhattisgarh, India

<sup>3</sup>Assistant Professor, Modern Institute of Technology and Research Centre, Alwar, Rajasthan, India

<sup>4</sup>Assistant Professor, RSR Rungta College of Engineering and Technology, Bhilai, Chhattisgarh, India

## ABSTRACT

### Article Info

Volume 5, Issue 2

Page Number : 17-26

### Publication Issue :

March-April-2021

### Article History

Accepted : 05 March 2021

Published : 15 March 2021

Dies for aluminium alloys die-casting fail because of a great number of different and simultaneously operating factors. Some of them may be controlled to some extent by the die-casting experts. In the process of the die-casting the primary source of loading is cyclic variation of the temperature; the influence of other loads is relatively insignificant. For economical production of aluminium and aluminium alloys die castings it is important that the dies have a long working life. The replacement of a die is expensive in both: money and production time. The die design, the material selection and the process thermal fatigue stress which is the consequence of the working conditions, the inhomogeneous and to low initial temperature of the die, contribute to the cracks formation. The main objective of this work to find out The thermal fatigue of die casting Aluminium Alloy (A02240) causes reduction in tool life and seriously affects the surface conditions such as microstructure, hardness, surface finish and residual stresses. The size and location of cooling channels relative to the surface of the die, which affect the thermal stresses and fatigue life of dies. This work focus on thermal fatigue analysis of Aluminium alloy pressure die casting process and analyses the effect of coolant channel location on temperature distribution and fatigue parameters such as life, damage, equivalent alternating stress and biaxiality using ANSYS Workbench 17.1 finite-element package.

**Keywords :** Aluminium Alloys, Die-Casting, Thermal Fatigue, Temperature Distribution, Life

## I. INTRODUCTION

Die casting is a very cost-efficient method of forming thin walled and complex near net-shaped products with geometric tolerances and good surface finish.


Low melting point alloys based on aluminium, zinc, magnesium and copper are frequently used. Many different types of products are manufactured by die casting such as engine blocks, cylinder head covers, valves, Pipe coupling etc. and other components for the automotive industry and for heating etc. In die

casting, large numbers of identical products are produced using one die, which is necessary, since the die is very expensive. Any kind of tool failure that causes rejection of casting and extra tool maintenance increases the production costs. The overall aim of this work to development of better tool materials for die casting. Die Casting tools are exposed to thermal mechanical and chemical conditions during each casting cycle. The service life of tools for aluminium die casting is most important thermal fatigue cracking, erosion, corrosion of the casting alloy to the tool. Thermal fatigue cracking in die casting of aluminium alloy, since the temperature of the melt is high.

**1.1 Die casting:** Die casting process is that the liquid metal is forced by the application of pressure to flow with high velocity during injection and completely and rapidly fill an internally cooled mould, typically within the order of milliseconds. The high melt velocity during injection and the continuous internal cooling of the tool during the process allows production of thin-walled net-shaped cast products at high manufacturing rates. The complexity of the castings and the manufacturing rate are considerably beyond those provided by the permanent mould (gravity) casting process.


There are two principal types of die casting machines, either classified as hot chamber or cold chamber machines. In the hot chamber machine process, the liquid metal injection mechanism is submerged in the molten metal, and the cylinder is automatically filled with metal prior to each casting operation when the injection plunger rod is withdrawn. This process is typically applied for low melting point casting alloys, which cause the minimum of attack on the injection system material during the contact with the liquid metal. In the cold chamber machine process, the injection mechanism is separated from the molten metal, and the cylinder is filled with metal prior to each casting operation using a ladle. The cold

chamber process minimises the liquid metal exposure of the injection system components, and it is normally applied for casting alloys with higher melting points, e.g. aluminium alloys.

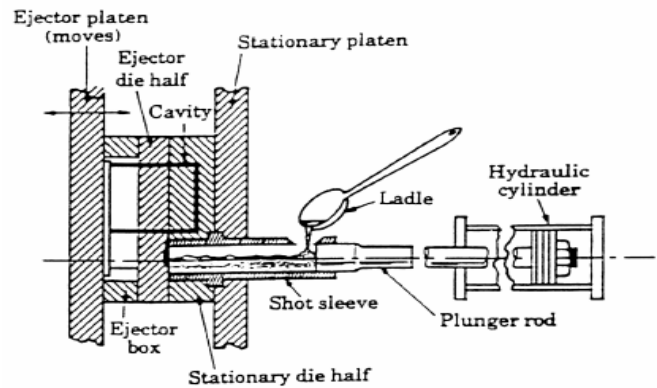

**Fig.1.1:** Cold-chamber die casting

**1.2 Die-Casting failure mechanism:** Aluminium alloys castings which are produced all through the world by the use of gravitational die casting or high pressure die casting is used in different automotive parts and consumer goods. One of the major concerns in die casting is the durability of die materials/surface when they are exposed to pressurised casting process during filling, high temperature molten aluminium flow, and solidification and die holding stages. In die casting process, the molten aluminium alloy is injected into die cavity at high speed of 30-100 m/s at temperatures between 670 – 710 °C and injection pressure of 50-80 MPa. Several failure modes appear on aluminium die casting surface such as soldering effects, washout gross-cracking and thermal fatigue cracking which happen in effect of heat checking. Die-casting dies are high mechanical and thermal loads. Thermal fatigue cracking of dies which is caused by thermal cycling might considerably reduce the die lifetime. Cracks reduce the surface quality of dies and consequently the surface of castings will decline. During the process cracks are identified and their size and location are measured. Thermal and mechanical loads produce high local stresses which make the surface to crack.

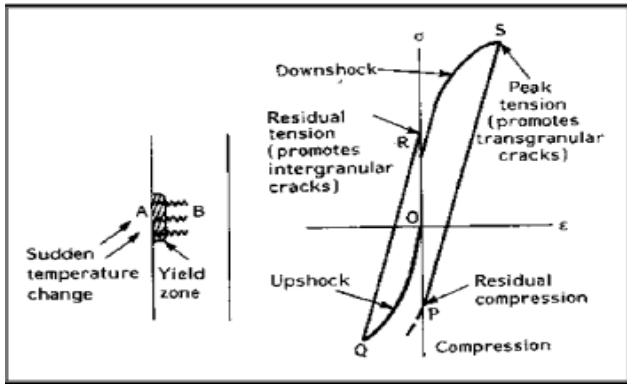

**Fig.1.2:** Hysteresis loop at the surface of a material subjected to cyclic heating cooling

**1.3 Thermal Fatigue in Die-Casting:** The thermal fatigue resistance of aluminium alloy can be studied through high-pressure die-casting process. The thermo-mechanical fatigue causes heat checks on the surface. The mechanical properties of the material grow instable in result of heating the die material. The thermal stresses, which take place in the die, develop from the thermal gradient across the die area. The thermal gradient is made in the result of the heating and cooling of the surface during the injecting stages of the casting cycle. With an increase in the temperature, the yield strength of the material is lowered and the compressive strains might grow plastic. The surface temperature decline quickly once a flow of heat is conducted to the lower layers. When the casting is ejected, cooling the surrounding from

the surface help to decrease the surface temperature. If the surface cools more than the interior, the compressive strain are released and tensile strains might be produced.

**1.4 Thermal Stress in Dies-Casting:** The thermal stresses, which take place in the die, develop from the thermal gradient across the die area. The thermal gradient is made of the heating and cooling of the surface during the ejecting, injecting stages of the casting cycle. When the molten aluminium is injected into the die, the die surface heats up as opposed to the cooler mass of the die. With an increase in the temperature, the yield strength of the material is lowered, and the compressive strains might grow plastic. When the casting is ejected, cooling the surroundings from the surface, and further decrease the surface temperature.

## II. Material Properties

In our investigation work a complex analysis of a typical dies for die-casting of aluminium alloys (A02240). The material used in the object is high pressure die casting of aluminium alloys. Aluminium alloy (A02240) with the composition shown in table 2.1

**Table 2.1 :** Chemical Composition of Aluminium Alloy (A02240)

Chemical Composition	Al	Cu	Mn	Ti	Zr	V	Fe	Si
A02240	93-95.2	4.5-5.5	0.2-0.5	0.35	0.1-0.25	0.050-0.15	0.1	0.060


**Table 2.2:** Properties of Aluminium Alloy (A02240)

Density(g/cm <sup>3</sup> )	3.0
Tensile Strength(MPa)	350


Modules of Elasticity (GPa)	71
Specific Heat(J/kg K)	870
Thermal Conductivity(W/m.K)	120
Poisson's Ratio( $\nu$ )	0.33

### III. Transient Thermal and Structural Analysis

**3.1 Geometric modelling of die-casting:** The discretization of the geometric model was carried out using ANSYS workbench 17.1 was discretize the CAD model with quadratic displacement behaviour is exhibited by the elements.

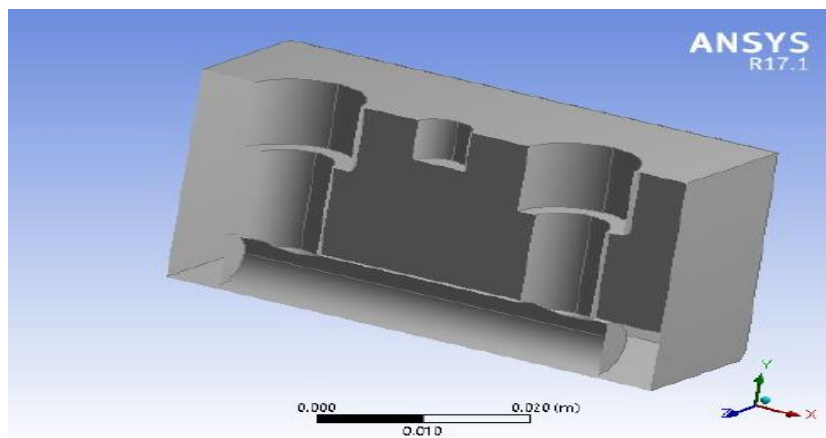

**Fig.3.1:** Geometrical 3D CAD model

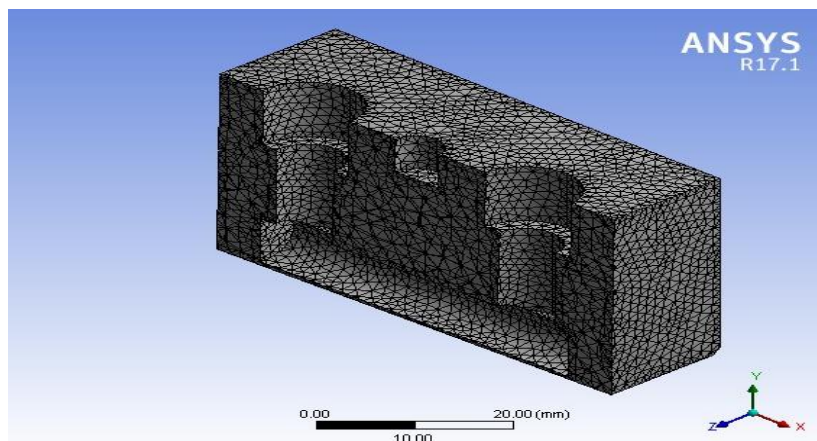

**Fig.3.2:** Messing of Die Geometry

### 3.2 Thermal Analysis of Aluminium Alloy (A02240) Die Casting:

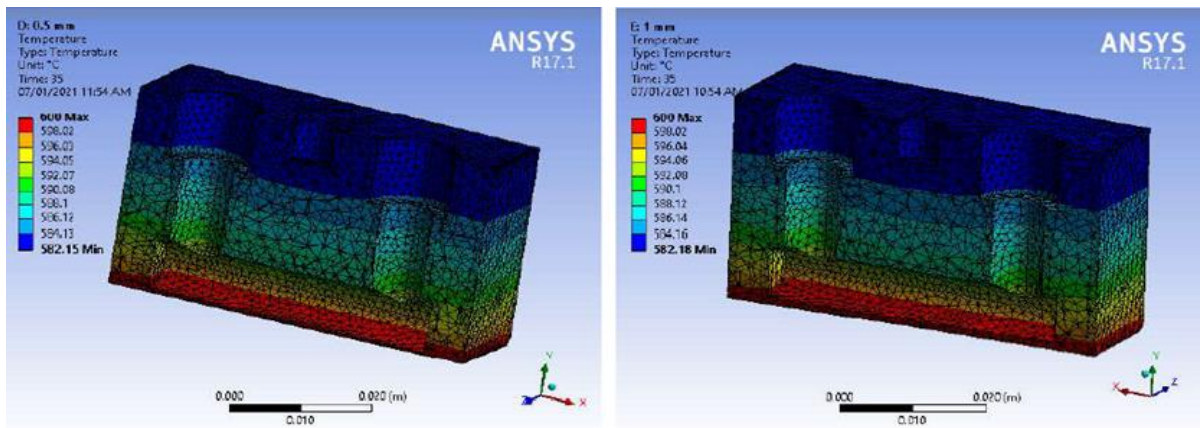


Fig.3.3 (a) Temperature Distribution for 0.5 mm base location (b) Temperature Distribution for 1 mm base location

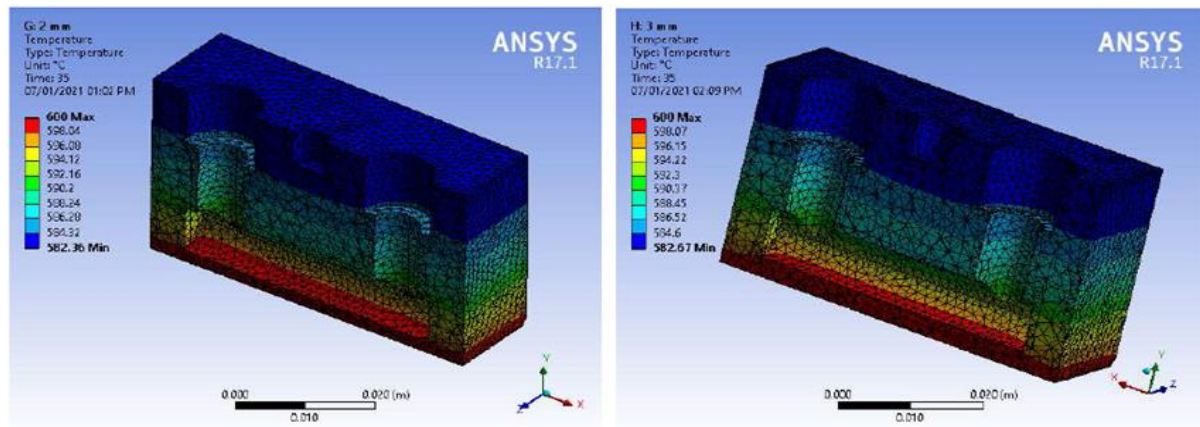


Fig.3.4 (a) Temperature Distribution for 2 mm base location (b) Temperature Distribution for 3 mm base location

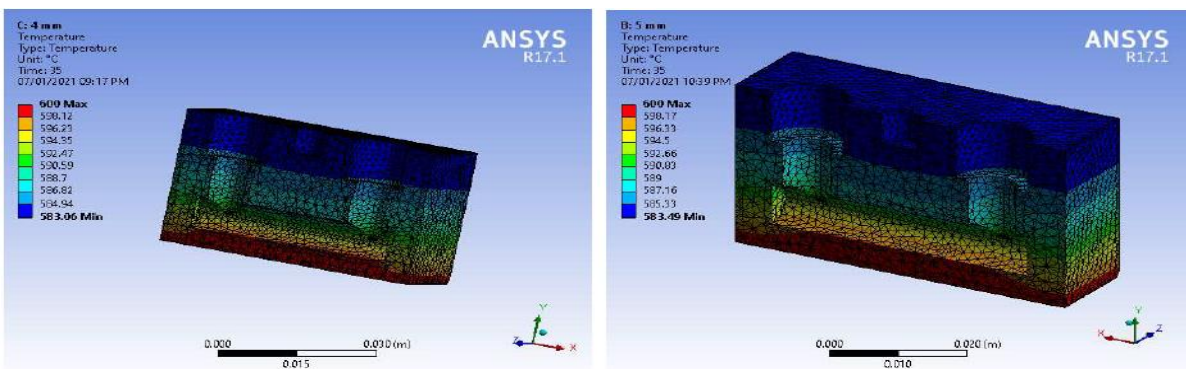


Fig.3.5 (a) Temperature Distribution for 4 mm base location (b) Temperature Distribution for 5 mm base location

### 3.3 Fatigue Analysis (Life) of Aluminium Alloy (A02240) Die Casting:

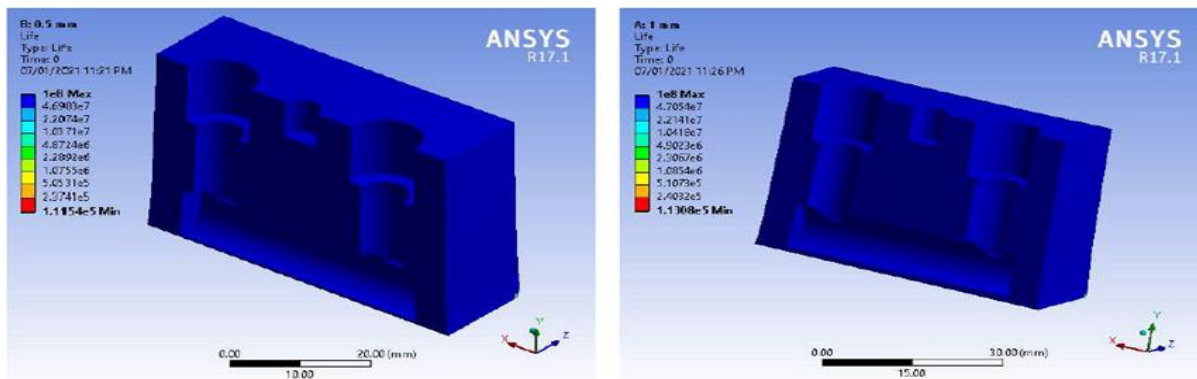


Fig.3.6 (a) Fatigue Life for 0.5 mm base location (b) Fatigue Life for 1 mm base location

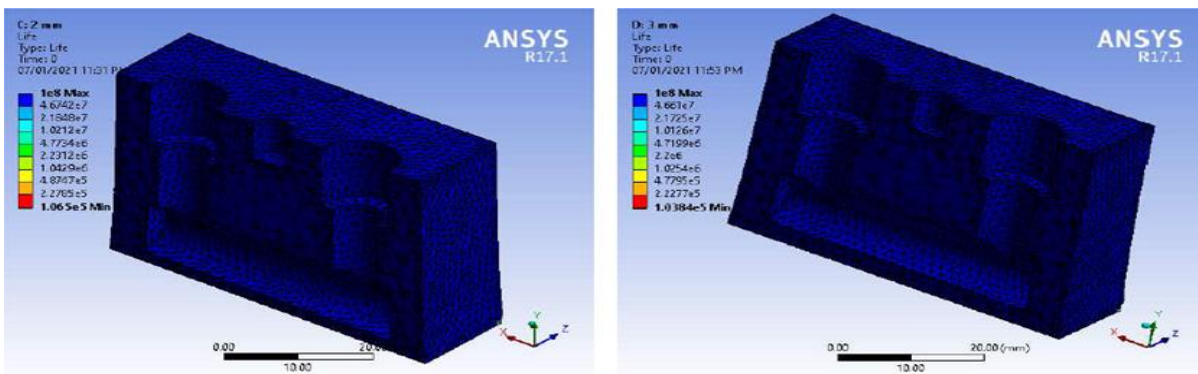


Fig.3.7 (a) Fatigue Life for 2 mm base location (b) Fatigue Life for 3 mm base location

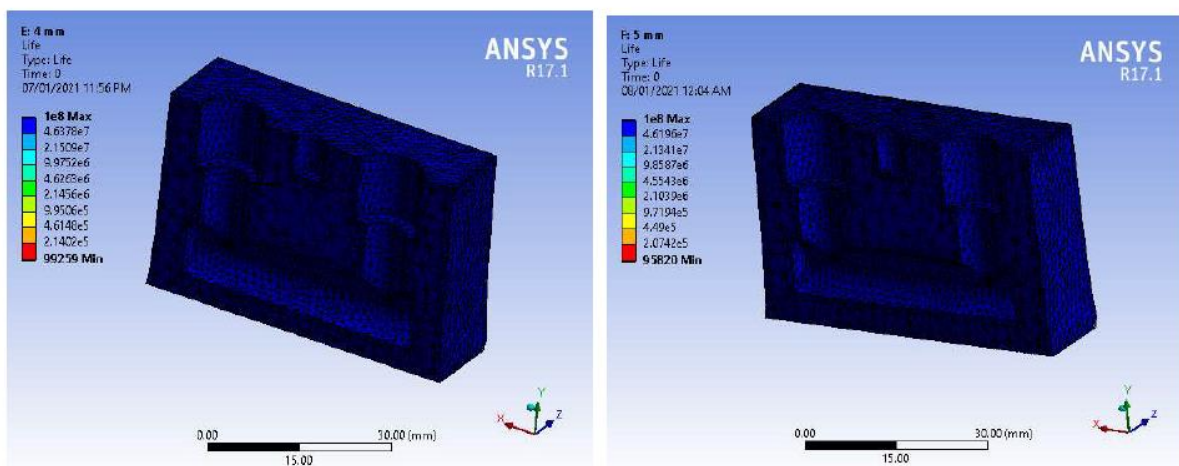



Fig.3.8 (a) Fatigue Life for 4 mm base location (b) Fatigue Life for 5 mm base location

**Table 3.1:** Results of thermal fatigue simulation test for Aluminium Alloy (A02240) Die Casting

Sr. No.	Coolant channel location (mm)	Temperature (°C)	Normal Stress (MPa)	Fatigue Life(cycles)	Fatigue Damage	Equivalent Alternating stress(MPa)	Biaxiality Indication
1	0.5	582.15	242.24	111540	8965.4	177.92	0.99479
2	1	582.18	241.56	113080	8843.1	177.59	0.99889
3	2	582.36	243.13	106500	9389.5	179.05	0.98172
4	3	582.67	244.57	103840	9630.6	179.66	0.9943
5	4	583.06	245.76	99259	10075	180.76	0.99494
6	5	583.49	245.39	95820	10436	181.62	0.99411

#### IV. RESULTS AND DISCUSSIONS

**4.1 Effect of coolant channel position on temperature distribution:** Figure 3.3(b) illustrates the temperature distribution of aluminium alloy (A02240) for the coolant channel location situated at 1 mm from the base and Figure 3.3(a) illustrates temperature distribution for varying coolant channel locations. The coolant channel location situated at 0.5 mm from the base experienced a temperature of 582.15 °C, whereas other positions at 1,2,3,4 and 5 mm from the base experienced 582.18, 582.36, 582.67, 583.06 and 583.49 °C, respectively. The minimum temperature of the die that has to be maintained to reduce the thermal crack and the average tool temperature is usually kept at determined levels through internal cooling. Cooling channel close to the bottom surface increases the heat transfer rate through forced convection, resulting in less thermal expansion. From this, it is expected that the thermal fatigue cracks will appear at the specimen surface due to higher temperature and due to the decreased strength at elevated temperature. As the coolant channel location distance from the base increases, the surface temperature increases for aluminium alloy (A02240). Hence, it leads to expectation of crack initiation at higher distance from the coolant channel location.

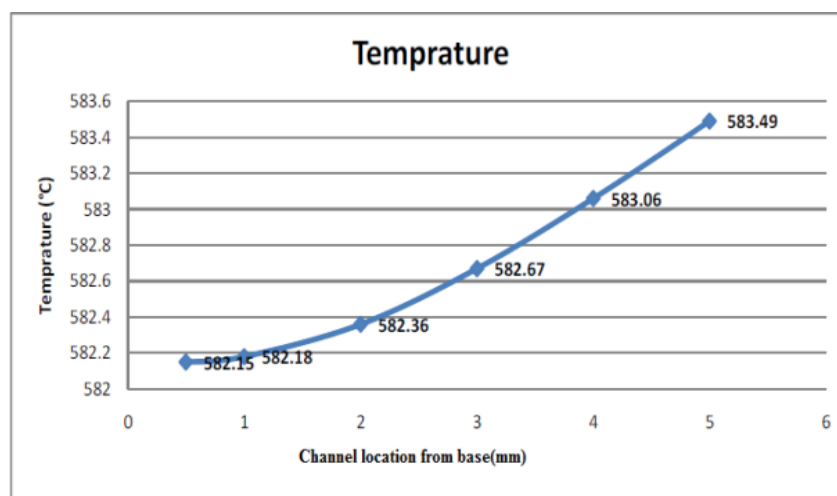**Fig. 3.9:** Temperature distribution for aluminium alloy

**4.2 Effect of coolant channel location on die fatigue life:** Geometry plays an important role in the stresses produced during thermal fatigue loading. Table 3.1 the results of coolant channel location on die fatigue life for aluminium alloy (A02240). The coolant channel location situated at 1 mm from the base experiences increase in fatigue life due to cooling channel nearer to the base; it experiences a minimum normal stress 241.56 MPa for aluminium alloy (A02240) due to thermal expansion. As the wall thickness of the die increases, the normal stresses start increasing. Also the die life drastically decreases. This may be explained by the fact that die casting of thin-walled specimen encounters high turbulent flow of molten material, which will induce volume porosity; this in turn decreases the die life.

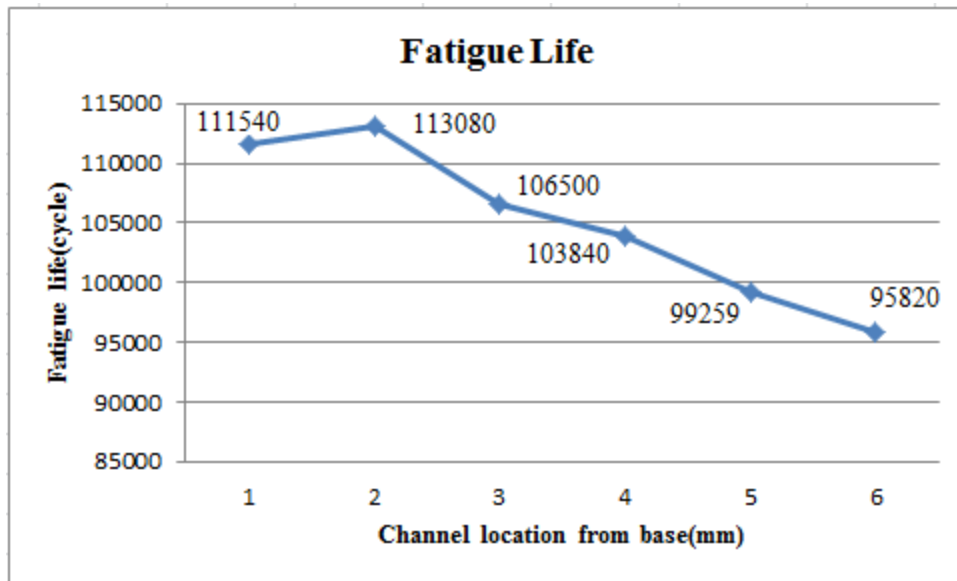


Fig. 3.10: Fatigue life for aluminium alloy

**4.3 Effect of coolant channel position on fatigue damage:** Fatigue damage is a contour plot of the fatigue damage at a given design life. Fatigue damage is defined as the design life divided by the available life. The coolant channel location 1 mm from the base, as shown in figure experiences less fatigue damage of about 8843.1 for aluminium alloy (A02240) with coolant channel locations. The thermal fatigue damage is a function of thermal gradient and thermal expansion coefficient of the material. According to Abdulhadi et al, compression stresses developed exceed the elastic limit of the die material only if the integration of the temperature gradient and the widespread thermal expansion is high enough. In the present case, when the coolant channel position is increased from 0.5 to 1 mm there is no considerable change in temperature distribution and hence thermal gradient does not contribute for increase in fatigue damage. Hence the fatigue damage decreased from increase in coolant position.

**4.4 Effect of coolant channel position on equivalent alternating stress:** In a stress-fatigue life analysis, one always needs to query for an S-N curve to relate the fatigue life to the stress state. Thus the "equivalent alternating stress" is the stress used to query for the fatigue S-N curve after accounting for fatigue loading type, mean stress effects, multiaxial effects and any other factors in the fatigue analysis. Thus, in a fatigue analysis, the equivalent alternating stress can be thought of as the last calculated quantity before determining the fatigue life. The coolant channel location 1 mm from the base has less equivalent alternating stress of about 177.59



MPa for aluminium alloy (A02240) as shown in figure. Hence increase in coolant channel location from the base with increases the stresses.

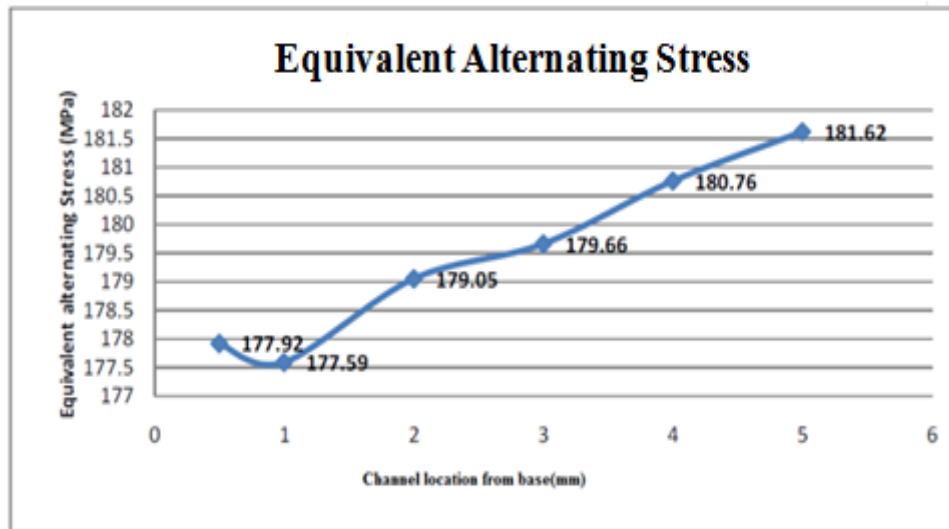


Fig. 3.11: Equivalent alternating stress for aluminium alloy

**4.5 Effect of coolant channel position on biaxiality indication:** Biaxiality indication is defined as the principal stress smaller in magnitude divided by the larger principal stress with the principal stress nearest zero ignored. A biaxiality of zero corresponds to uniaxial stress, a value of -1 corresponds to pure shear and a value of 1 corresponds to a pure biaxial state. Variation of coolant channel locations for the biaxiality plot indicates that the model approaches towards biaxiality stress state. A summary of thermal fatigue simulation results obtained is presented in table 3.1.

## V. CONCLUSION

The life of high-pressure die casting could be increased by using an effective cooling channel near the base and greater thermal stable of mechanical properties at operational temperature. Thermal fatigue analysis was carried out using Workbench 17.1 package in order to characterize mainly included temperature distribution, normal stress and fatigue life. The results indicated that the coolant channel location at 0.5 mm from the base induces maximum normal stress of 245.39 MPa, minimum fatigue life of 9582. However, the coolant location at 1 mm from the base experiences the temperature of 582.18 °C, which corresponds to minimum normal stress of 241.56 MPa, fatigue life of 11308 cycles. This is

considered to be the best among the coolant channel locations.

## VI. REFERENCES

- [1]. JCollot et al Review of New Process Technologies in the Aluminum Die-Casting Industry Materials and Manufacturing Processes, 200116(5): p595-617.
- [2]. QHan, and SViswanathan, Analysis of the mechanism of die soldering in aluminium die casting Metallurgical and Materials transactions, 200334(1): p139-146.
- [3]. ASrivastava, VJoshi and R Shivpuri; 2004; Computer modelling and prediction of thermal fatigue cracking in diecasting tooling IntJWear 256: 38-43.
- [4]. DSchwam, JFWallace and SBirceanu; 2004; Effect of design factors on thermal fatigue cracking of die

- casting dies DE-FC07-00ID138486, US Department of Energy, Washington, DC.
- [5]. DNovovic, RCDewes and DKAspinwall; 2004; The effect of machined topography and integrity on fatigue life IntJMach Tools Manuf 44 :125-134.
- [6]. MOkayasu; 2009; Comparison of mechanical properties of die cast aluminium alloys: cold vs hot chamber die casting and high vs low speed filling die casting IntJCast Met Res 22: 324-381.
- [7]. SAqida et al., Thermal fatigue properties of laser treated steels International Journal of Material Forming, 2010 3(1): p797-800.
- [8]. J.J.Moverare,; DGustafsson Hold-time effect on the thermo-mechanical fatigue crack growth behaviour of inconel 718 MaterSciEngA 2011, 528, 8660-8670.
- [9]. SChang, K.Huang, and YWang, Effects of thermal erosion and wear resistance on AISI H13 tool steel by various surface treatments Materials Transactions, 2012 53(4): p745-751.
- [10]. DKlobčar,; LKosec; J.Tušek; Thermo fatigue cracking of die casting dies EngFailAnal 2012, 20, 43-53.
- [11]. IKoutiri, , et al., High cycle fatigue damage mechanisms in cast aluminium subject to complex loads International Journal of Fatigue, 2013 47: p44-57.
- [12]. DMatiskova,; SGaspar,; LMura, Thermal factors of die casting and their impact on the service life of moulds and the quality of castings Acta Polytech Hung 2013, 10, 65-78.
- [13]. DMatiskova,; SGaspar,; LMura, Thermal factors of die casting and their impact on the service life of moulds and the quality of castings Acta Polytech Hung 2013, 10, 65-78.
- [14]. Fazliana Fauzun, SNAqida, SNAher and DBrabazon; 2014; effects of thermal fatigue on laser modified H13 Die Steel; Journal of mechanical engineering and sciences (JMES); ISSN:2289-4659; volume 6, pp975-980.
- [15]. Xu, W.; Li, W.; Wang, Y Experimental and theoretical analysis of wear mechanism in hot-forging die and optimal design of die geometry Wear 2014, 318, 78-88.
- [16]. Qian wan, Haidong Zhao and Chun Zou; 2014; effect of micro porosities on fatigue behavior in Aluminium die casting by 3D x-ray tomography inspection; doi.org/10.2355/isijinternational.
- [17]. OAmmar,; NHaddar,; LRemy, Numerical computation of crack growth of low cycle fatigue in the 304L austenitic stainless steel EngFractMech 2014, 120, 67-81.
- [18]. IVicario, JKIdoiaga, EArratibel and PCaballero; 2015; Development of HPDC advanced dies by casting with reinforced tool steels; International Journal of manufacturing Engineering; doi.org/10.1155/2015/287986.
- [19]. CChen; YWang; Energy-based approach to thermal fatigue life of tool steels for die casting dies IntJFatigue 2016, 92, 166-178.
- [20]. Xu Li, Bao-sheng Liu, Li-feng Hou and Ying-hui Wei; 2017; Failure investigation of an AlSi9Cu3 Alloy Die-Cast Cavity Insert; Journal of failure analysis and prevention; issue 6.
- [21]. Ibrahim Ozbay, Tamer Aydiner, Gurkan Yilmazoglu and Hafize Celik; 2019; Aluminium high pressure Die casting application on rear frame rails; European mechanical science; e-ISSN: 2587-1110.
- [22]. Federico Simone Gobber, Andrea Giuseppe Pisa and Mario Rosso; 2019; design of a Test Rig for the characterization of thermal fatigue and soldering resistance of the surfaces of tool steels for high pressure die casting dies; Steel research International: doi.org/10.1002/srin.201900480.

**Cite this article as :**

Poshan Dewangan, Ved Prakash Dewangan, Sushil Kumar Maurya, Lokesh Singh" Effect of Die Geometry on Fatigue Analysis of Aluminium Alloy (ADC12 Aluminium A383) using Pressure Die Casting Process", International Journal of Scientific Research in Civil Engineering (IJSRCE), ISSN : 2456-6667, Volume 5 Issue 2, pp. 17-26, March-April 2021. URL : <https://ijsrce.com/IJSRCE21528>